

# W35N Series

- Higher Density
- 120MB/s and up to 240MB/s



## OctalNAND Flash


*fast, low-cost alternative to Octal NOR Flash in densities of 1Gbit and higher*

### General Description

The world's first x8 Octal interface for NAND Flash, Winbond's OctalNAND Flash enables automotive and industrial manufacturers to provide code storage in high density without having to pay a premium for NOR Flash, a fast memory technology which scales poorly at densities above 512Mbits.

The first Winbond product to include the new interface, the 1Gbit W35N01JW, offers a maximum continuous Read throughput of 240MB/s, three times faster than the earlier high-performance W25N-JW Quad Serial NAND Flash family. Winbond OctalNAND Flash is capable of erasing up to 400 times faster and programming up to 50 times faster than serial NOR Flash which is suitable for OTA applications.

Manufactured in Winbond's proven 46nm Single Level Cell (SLC) NAND fabrication process, the W35N-JW OctalNAND Flash offers excellent data integrity and more than ten years' data retention. It is specified to perform more than 100,000 Program/Erase cycles, providing the high level of endurance and reliability required in mission-critical automotive and industrial applications.

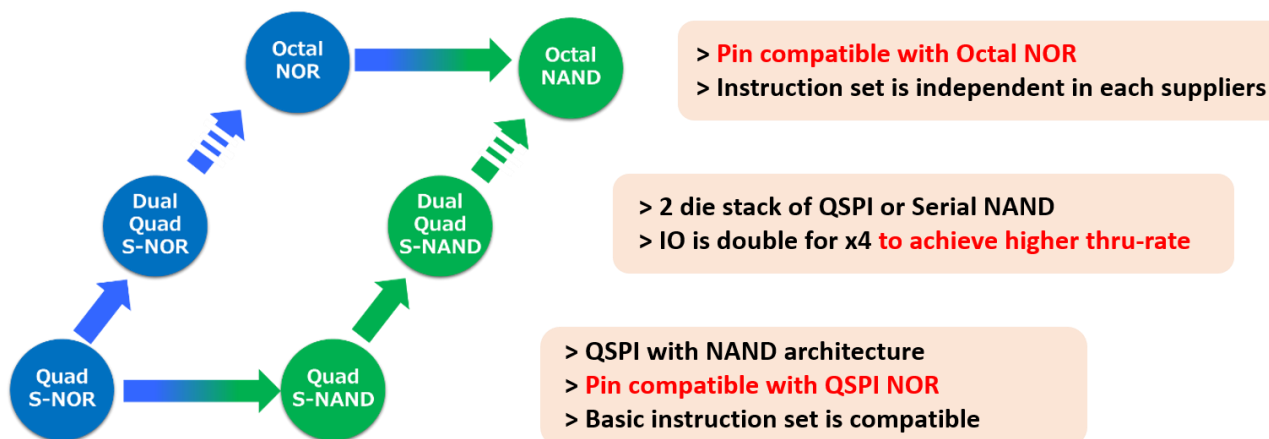

# Applications

## Automotive

- Instrument Cluster Applications
- Fast Booting

## Consumer

- Fast Booting

## Package Information

Voltage	Density	Part Number	Speed (MHz)	I/O	Package
1.8V	1Gb	W35N01JW	166 MHz (STR) 120 MHz (DTR)	x1/x8	BGA24
	2Gb	W35N02JW			
	4Gb	W35N04JW			

\* See data sheet for further technical information. This is subject to change without notice.

## Own Logic and Memory Technology

Winbond Electronics Corp. is an Integrated IC Company engaged in IC design, manufacturing and sales services. From product design, research and development, wafer fabrication to marketing of brand name product, Winbond endeavors to provide its global clientele top quality of low to medium density memory solutions.

## Own 12-inch Fab

Winbond specializes in the design of high-performance, low-power memory, and riding on the strength of having a 12-inch fab, offers a whole series of SLC code storage NAND flash memory and Mobile DRAM. The in house wafer fabrication provides customers with full commitment in capacity support as well as delivery flexibility.



# winbond

Corporate Headquarter  
No. 8, Keya 1<sup>st</sup> Rd., Daya Dist., Taichung City 428, Taiwan  
Tel: 886-4-25218168  
Email: [mkt\\_online@winbond.com](mailto:mkt_online@winbond.com)

Winbond Electronics Corporation America  
2727 North First Street, San Jose, CA 95134, U.S.A.  
Tel : 1-408-943-6666



[www.winbond.com](http://www.winbond.com)