

SLC NAND Flash

- Gigabit solution for high-density applications
- High flexibility of ECC



SLC NAND Flash

ONFi 1.0 compliant SLC NAND solution

Winbond, a leading provider of memory solutions, offers a family of Single-Level-Cell (SLC) NAND Flash memories designed to meet the demands of the Gigabit code storage market. With densities ranging from 1Gb to 8Gb, these products follow the industry standard for command set, interface, and packages.

Winbond's SLC NAND Flash is compliant with ONFi 1.0 and is available in various temperature ratings. To meet the stringent demands of embedded applications, we offer both industrial and automotive grades at temperatures up to 115°C. This extended temperature support makes Winbond's SLC NAND Flash memories ideal choices for customers seeking dependable solutions across a wide range of applications.

Winbond SLC NAND Flash are allocated with flexible spare area, supporting 1-bit, 4-bit, or 8-bit ECC to address the diverse reliability and performance requirements of embedded systems. This allows customers to choose the product that best meets their needs and preferences. Whether you are considering an upgrade to your current code storage system or exploring new options, Winbond's SLC NAND Flash memories can address a variety of industrial, consumer, and automotive applications.

Automotive / Industrial

- Central Information Center
- Vehicle-To-Everything (V2X)
- Point of Sale (POS), Automation


Consumer

- Networking, XDSL, Passive Optical Network (PON)
- M2M Module, Surveillance
- Printer, Digital Camera
- Set-Top Box (STB)
- IoT

1 Page = 2048+64 Bytes

1 Block = 64 Pages
= (128K+4K) Bytes

1 Device = 1024 Blocks
= (128M+4M) Bytes

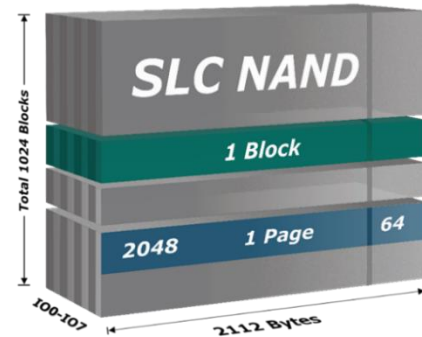

Note: Regarding the page size of each part number, please refer to the table in page 2.

Winbond SLC NAND Flash Memory Selection Guide

| Voltage | Density | Part Number | Page Size | ECC Required | I/O | Package Type |
|---------|---------|-------------|-------------|----------------|--------|------------------------------------|
| 3V | 8Gb | W29N08GV | 2K+64Bytes | 1-bit or 4-bit | X8 | TSOP48 ¹ , BGA63 |
| | 4Gb | W29N04GV | 2K+64Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA63 |
| | 2Gb | W29N02GV | 2K+64Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA63 |
| | | W29N02KV | 2K+128Bytes | 4-bit or 8-bit | | TSOP48 ¹ , BGA48, BGA63 |
| | 1Gb | W29N01HV | 2K+64Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA48, BGA63 |
| 1.8V | 8Gb | W29N08LW/Z | 4K+256Bytes | 1-bit or 4-bit | X8/X16 | TSOP48 ¹ , BGA63 |
| | | W29N08GW/Z | 2K+64Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA63 |
| | 4Gb | W29N04LW/Z | 4K+256Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA63 |
| | | W29N04GW/Z | 2K+64Bytes | 4-bit or 8-bit | | TSOP48 ¹ , BGA63 |
| | 2Gb | W29N02GW/Z | 2K+64Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA63 |
| | | W29N02KW/Z | 2K+128Bytes | 4-bit or 8-bit | | TSOP48 ¹ , BGA48, BGA63 |
| | 1Gb | W29N01HW/Z | 2K+64Bytes | 1-bit or 4-bit | | TSOP48 ¹ , BGA48, BGA63 |

1. For TSOP48 package, please contact Winbond.

winbond

Winbond Electronics Corporation
No. 8, Keya 1st Rd., Daya Dist.,
Taichung City 428303, Taiwan
Tel: 886-4-25218168
Email: mkt_online@winbond.com

Version: Sep 2025

Winbond Electronics Corporation America
2727 North First Street,
San Jose, CA 95134, U.S.A.
Tel: 1-408-943-6666



www.winbond.com